

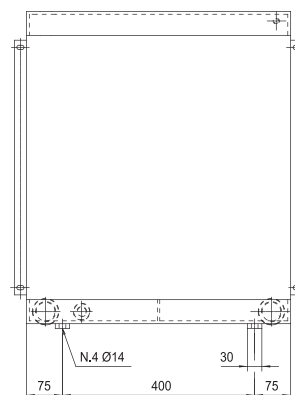




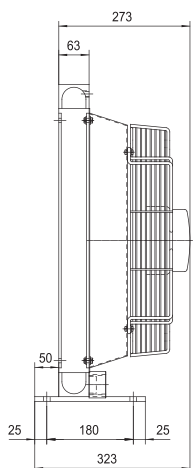


MG AIR




MG 2050K 2_{PASS}

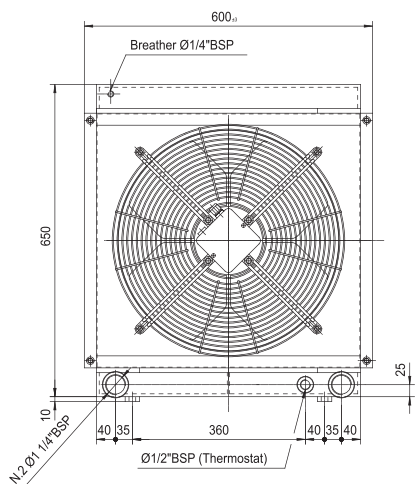

P/N 2G7003###

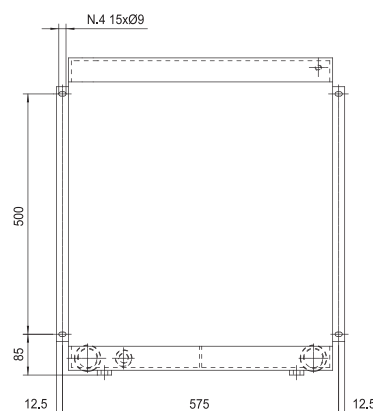
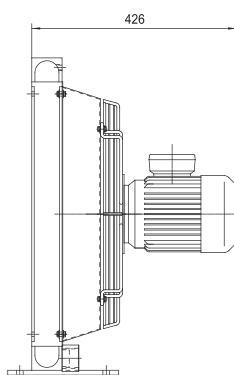
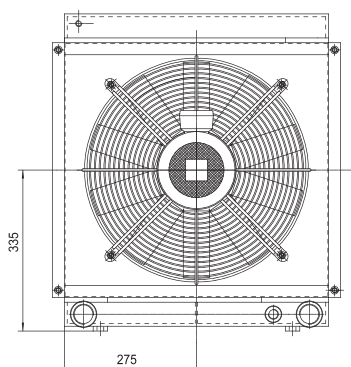


P/N 2G7004###

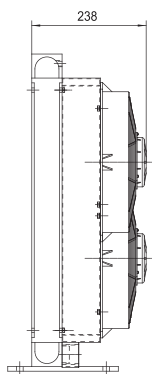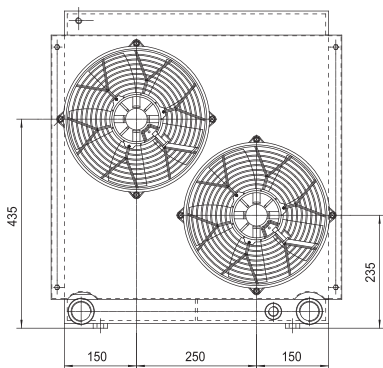

Setto di separazione
Flow separator

P/N 2G7012###
P/N 2G7024###

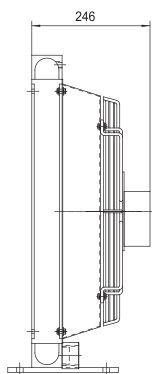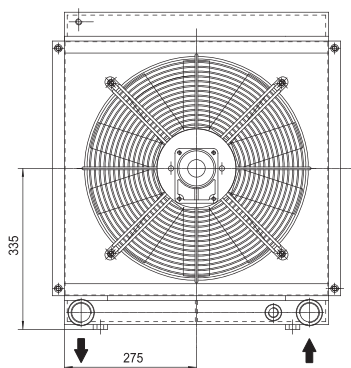

P/N 2G7056###

Le dimensioni di ingombro e le caratteristiche tecniche non sono impegnative
Overall dimensions and technical characteristic are not binding



Dati tecnici Technical Data


P/N	V	Hz	kW(±10%)	A(±10%)	rpm	Ø Fan	dB (A)	(m³ / h)	IP	It	kg
2G7003###	230-400 AC	50	0,52	1,9 - 1,1	1450	450	76	5100	54	5	27
	230-400 AC	60	0,66		1690						
2G7004###	230-400 AC	50	0,75	3,0-1,7	1440	445	79	4500	55	5	30
	265-460 AC	60	0,86		1750						
2G7012###	12 DC	/	0,13	11,0	2340	280	76	1785	68	5	24
2G7024###	24 DC	/	0,15	6,2	2600	280	79	1785	68	5	24
2G7056###	Prepared for Gr.2 hydraulic motor				☎	445	☎	☎	/	5	23

I dati si riferiscono al singolo ventilatore


Data refers to each fan

☎ Contattare EMMEGI Contact EMMEGI

Diagramma rendimento Performance diagram

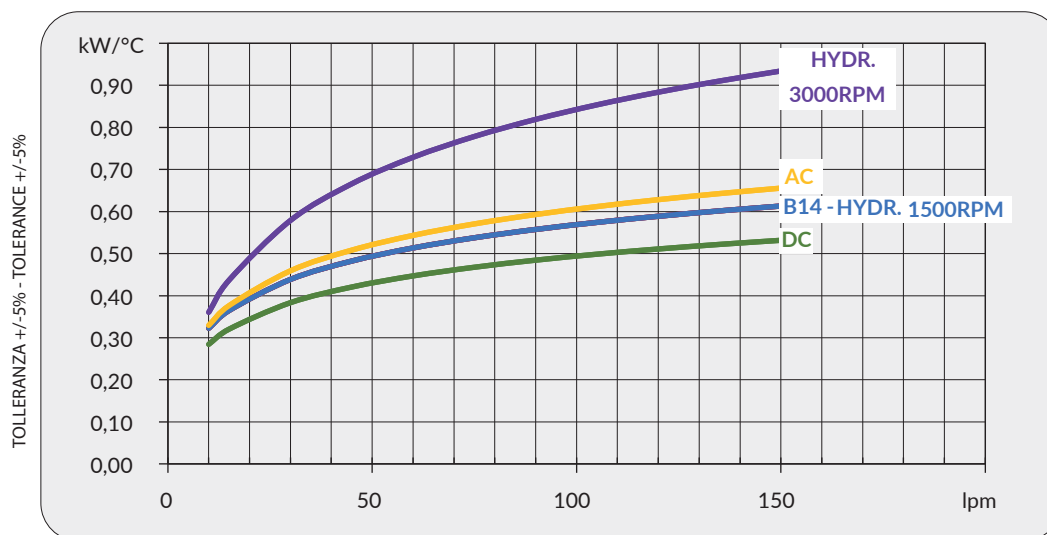

Perdite di carico Pressure drop (@30cSt)

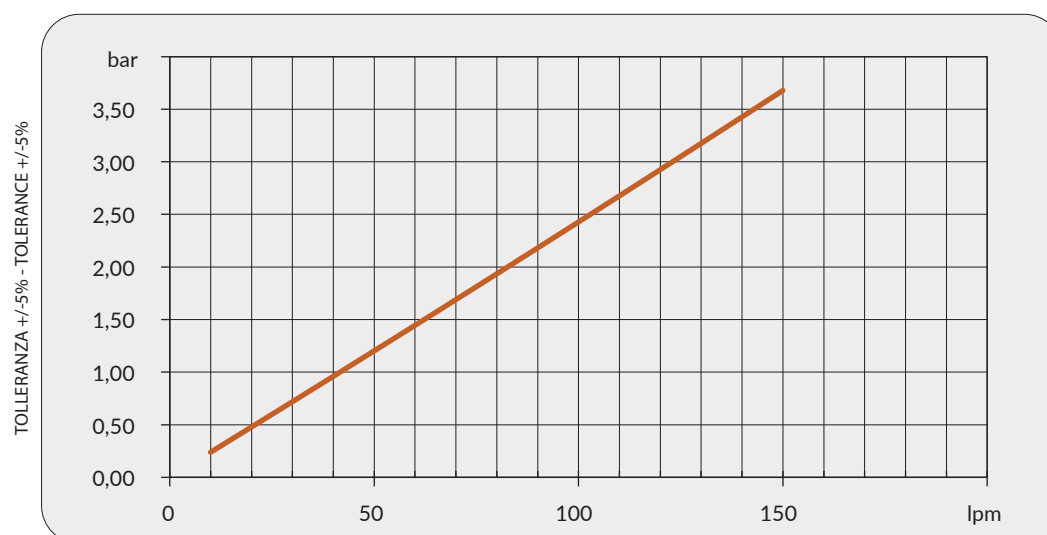

Fattore di correzione-F-(perdite di carico) Correction factor-F-(pressure drop)

cSt	10	15	20	30	40	50	60	80	100	200	300
F	0,5	0,65	0,77	1	1,2	1,4	1,6	1,9	2,1	3,3	4,3